

SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)
Standard: PA6T Black

接触件Contacts: Brass

接触电镀Contact Plating: Au or Sn over $30\mu\text{m}$ Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: $20\text{m}\Omega$ Max.



绝缘电阻Insulator Resistance: $1000\text{M}\Omega$ Min.

耐电压Withstanding Voltage: AC 500V

额定电流Current Rating: 1.5 AMP

适用温度范围Operating Temperature: -40°C to $+105^{\circ}\text{C}$

耐温性能Temperature resistance: $255^{\circ}\text{C} \pm 5^{\circ}\text{C}$, 3s-5s max

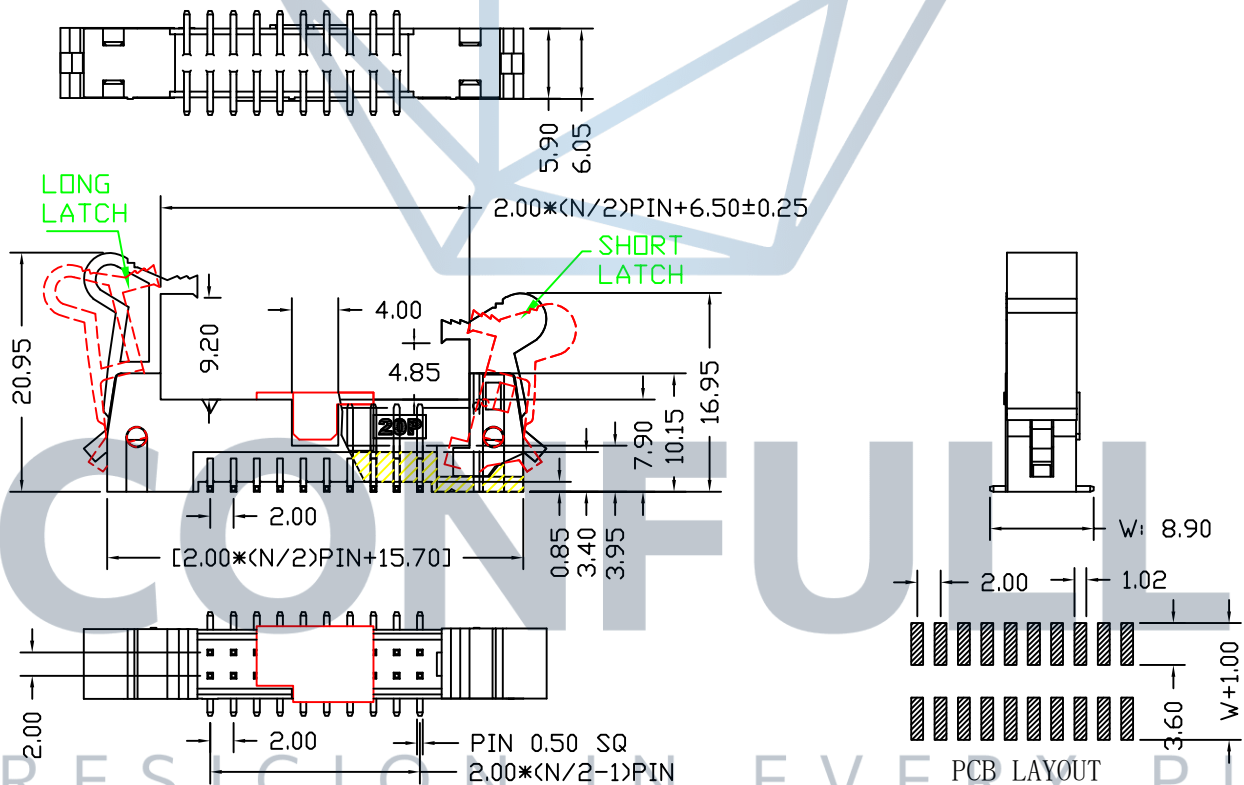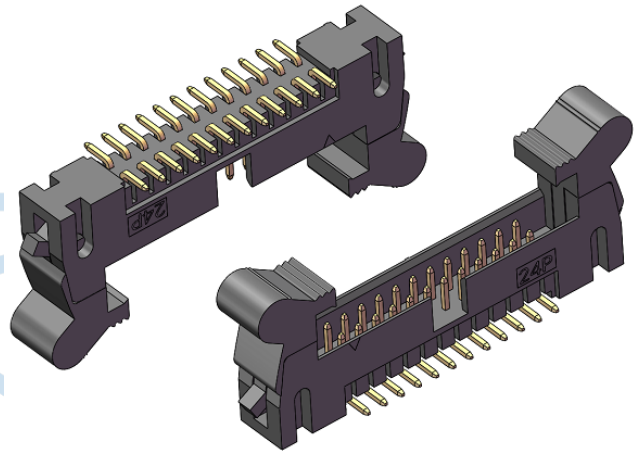

订购方法 How To Order

2.0牛角	<u>B</u>	<u>B</u>	<u>XX</u>	<u>M</u>	<u>T/A</u>	<u>G 0</u>	<u>XXX</u>
A=长耳扣 B=短耳扣	Material Type A=PBT B=Nylon-6T C=LCP D=Nylon-46	NO. of Positions Per Row 06 ~ 64	S: Straight(180°) R: Right Angle(90°) M: S.M.T	T: TIN(镀锡) A: Aureate (镀金)	Contact Plating SN: Tin G0: Gold Flash G2: 5u" Gold G3: 10u" Gold G4: 15u" Gold G5: 30u" Gold S0: Gold Flash/Tin Standard: G0	Pin Lenght W= 8.90	

常规表达: 型号 (2.0牛角) - 耳扣类型 (长/短) - 规格 (XXP) - 类型 (M) - 接触件镀层 (XXU") - 尺寸 (W=XXX)

* 其它要求的产品另外说明 Other requests's product on the other hand description