

SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)
Standard: PA6T Black

接触件Contacts: Phosphor Bronze

接触电镀Contact Plating: Au or Sn over 30 μ Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: 20m Ω Max.










绝缘电阻Insulator Resistance: 1000M Ω Min.

耐电压Withstanding Voltage: AC 500V

额定电流Current Rating: 1.0 AMP

适用温度范围Operating Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C

耐温性能Temperature resistance: 255 $^{\circ}$ C $\pm$ 5 $^{\circ}$ C, 3s-5s max

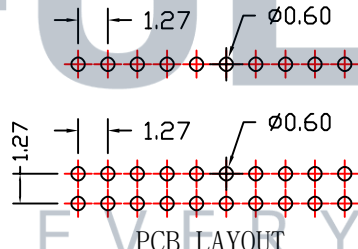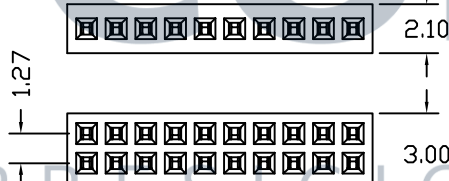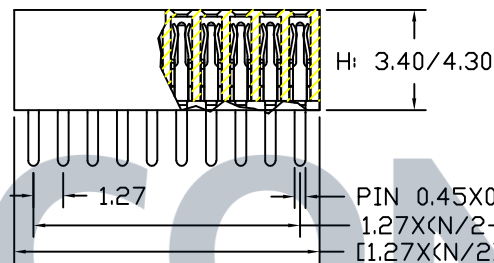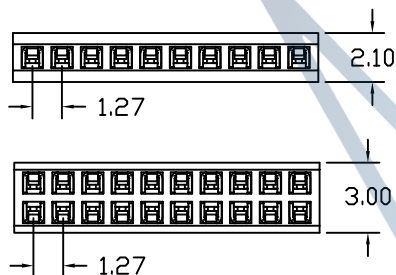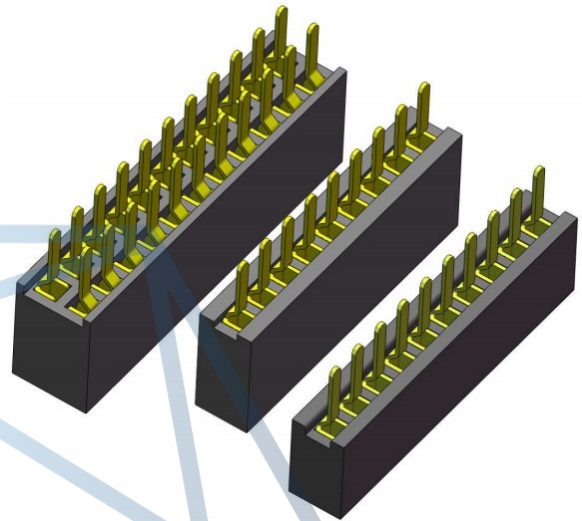

订购方法 How To Order

1.27排母	H	B	XX	S	T/A	G 0	XXX
Plastics Height H=3.4MM H=4.3MM		Material Type A=PBT B=Nylon-6T C=LCP D=Nylon-46	NO. of Positions Per Row 1X50 2X50	S: Straight(180 $^{\circ}$) R: Right Angle(90 $^{\circ}$) M: S.M.T	T: TIN(镀锡) A: Aureate (镀金)	Contact Plating SN: Tin G0: Gold Flash G2: 5u" Gold G3: 10u" Gold G4: 15u" Gold G5: 30u" Gold S0: Gold Flash/Tin Standard: G0	Pin Length 3.4/4.3 U型DIP端子 PC=2.4 PC=2.8

常规表达: 型号 (1.27排母座) - 胶芯高度 (H) - 规格 (1 or 2*XXP) - 类型 (S) - 接触件镀层 (XXU") - 尺寸 (PC=2.4/2.8)

* 其它要求的产品另外说明 Other requests's product on the other hand description