

SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)
Standard: PBT Black

接触件Contacts: Brass/Phosphor bronze

接触电镀Contact Plating: Au or Sn over 30 μ " Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: 20m Ω Max.



绝缘电阻Insulator Resistance: 1000M Ω Min.

耐电压Withstanding Voltage: AC 500V

额定电流Current Rating: 1.5 AMP

适用温度范围Operating Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C

耐温性能Temperature resistance: 205 $^{\circ}$ C $\pm$ 5 $^{\circ}$ C, 3s-5s max

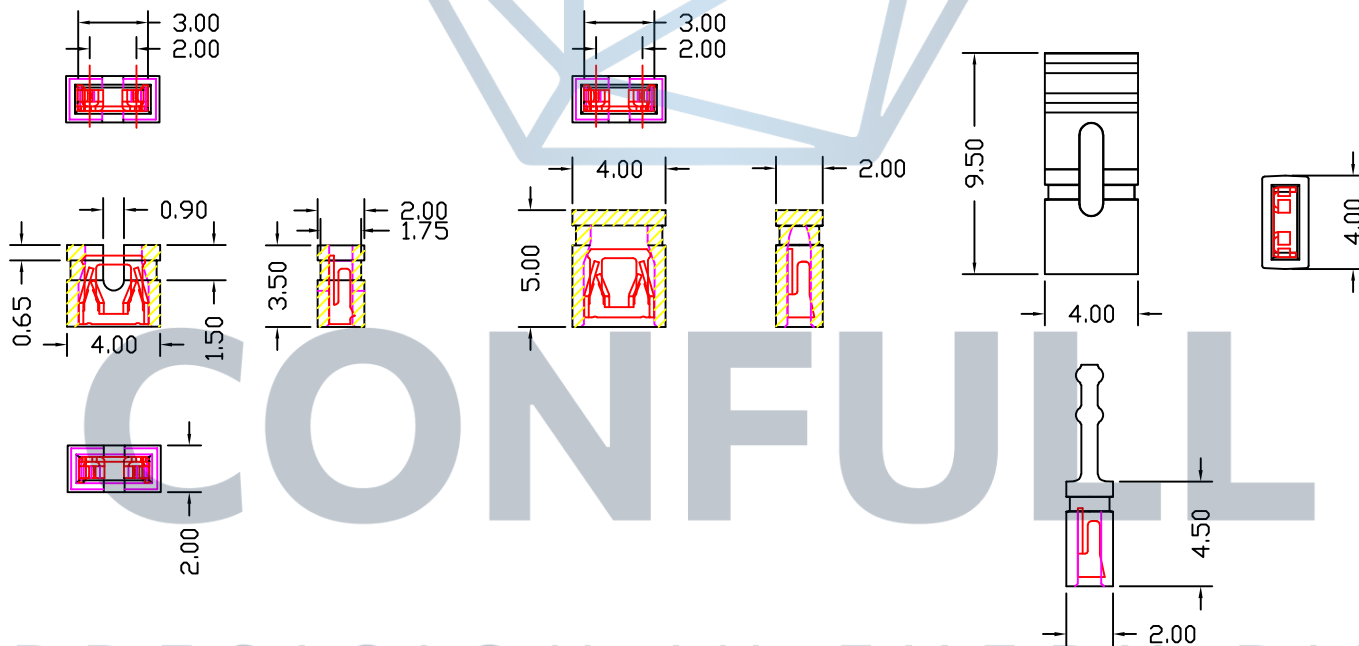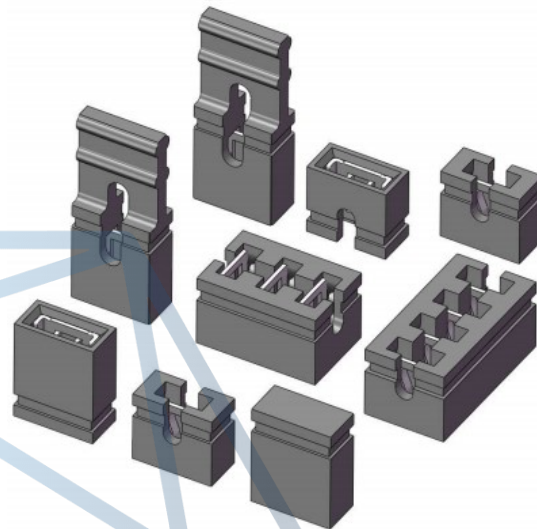

订购方法 How To Order

2.0 MJ	A	A	B	01	35		O	Ni
A=Mini Jumper B=Handle Type	Material Type A=PBT B=Nylon-6T C=LCP D=Nylon-46	Color Type B=Black U=Blue R=Red W=White Y=Yellow G=Grey	NO. of Positions 01=Single Type	Plastics Height 35=3.5mm 50=5.0mm 95=9.5mm	Function C=Close Type O=Open Type	Contact Plating Ni: Nickel SN: Tin G0: Gold Flash G2: 5u" Gold G3: 10u" Gold G4: 15u" Gold G5: 30u" Gold S0: Gold Flash/Tin Standard: G0		

常规表达: 型号 (2.0短路帽) - 材质 (PBT) - 颜色 (B) - 类型 (C/O) - 接触件镀层 (XXU")

* 其它要求的产品另外说明 Other requests's product on the other hand description