2.54mm Female Header, Single/Dual Row, Straight

SPECIFICATIONS

材质Material:

绝缘体（Insulator）: Polyester (UL94V-0)
Standard: PBT Black

接触件Contacts: Brass

接触电镀Contact Plating:Au or Sn over 30μ″ Ni

电气性能Electrical Charactristics:

接触电阻Contact Resistance:20mΩ Max.
绝缘电阻Insulator Resistance:1000MΩ Min.
耐电压Withstanding Voltage:AC 500V
额定电流Currrnt Rating:3 AMP
适用温度范围Operating Temperature:-40℃ to +105℃
耐温性能Temperature resistancet:205℃±5℃, 3s-5s max

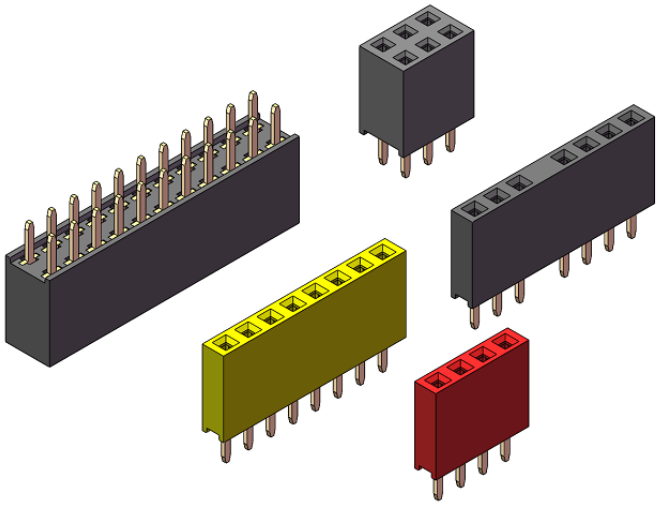

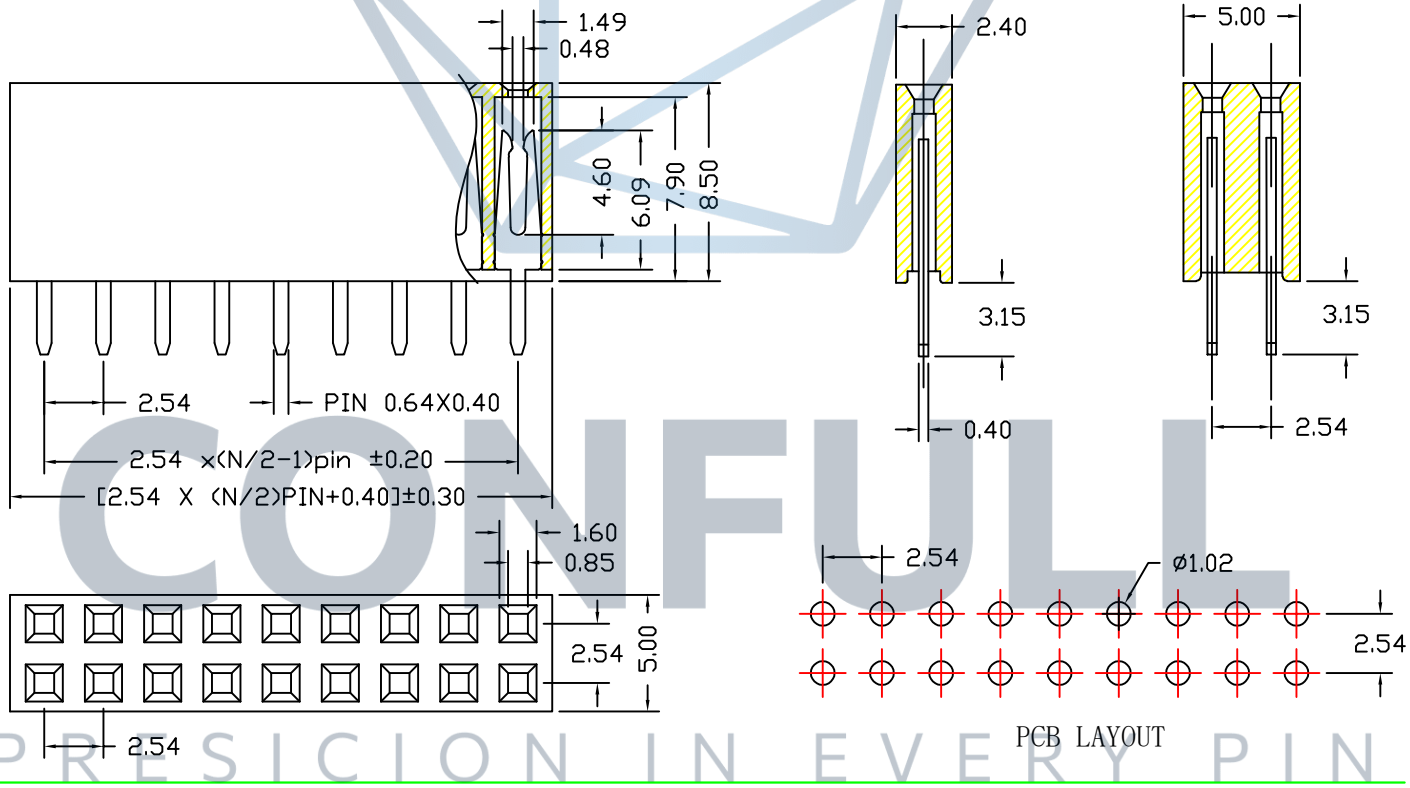

CONFULL
PRESICION IN EVERY PIN

订购方法 How To Order

2.54排母 — 85 — A — XX — S — T/A — G 0 — XXX

- 85: Plastics Height
  35=3.5mm
  50=5.0mm
  57=5.7mm
  68=6.8mm
  71=7.1mm
  80=8.0mm
  81=8.1mm
  85=8.5mm
  11=11mm
- A: Material Type
  A=PBT
  B=Nylon-6T
  C=LCP
  D=Nylon-46
- XX: NO. of Positions Per Row 02 thra 40
- S: S:Straight(180°)
  R:Right Angle(90°)
  M:S.M.T
- T/A: T:TIN(镀锡)
  A:Aureate (镀金)
- G 0: Contact Plating
  SN: Tin
  G0:Gold Flash
  G2: 5u" Gold
  G3: 10u" Gold
  G4: 15u" Gold
  G5: 30u" Gold
  S0:Gold Flash/Tin
  Standard:G0
- XXX: Pin Lenght (PC外露)
  PC= 3.15

常规表达：型号（2.54排母座）-胶芯高度（H）- 规格（1 or 2*XXP）- 类型（S）- 接触件镀层（XXU"）- PC尺寸（PC=3.15）

＊ 其它要求的产品另外说明Other requests's product on the other hand description

※网址:http://www.cysjconn.com ※ 邮箱：C297284403@163.com ☎ TEL:0755-27364746 FAX:0755-27364705