1.0mm Female Header, Dual Row, S.M.T

SPECIFICATIONS

材质Material:

绝缘体（Insulator）: Polyester (UL94V-0)
Standard: PA6T Black

接触件Contacts: Phosphor Bronze

接触电镀Contact Plating:Au or Sn over 30μ″ Ni

电气性能Electrical Charactristics:

接触电阻Contact Resistance:20mΩ Max.
绝缘电阻Insulator Resistance:1000MΩ Min.
耐电压Withstanding Voltage:AC 500V
额定电流Currrnt Rating:0.75 AMP
适用温度范围Operating Temperature:-40℃ to +105℃
耐温性能Temperature resistancet:255℃±5℃, 3s-5s max

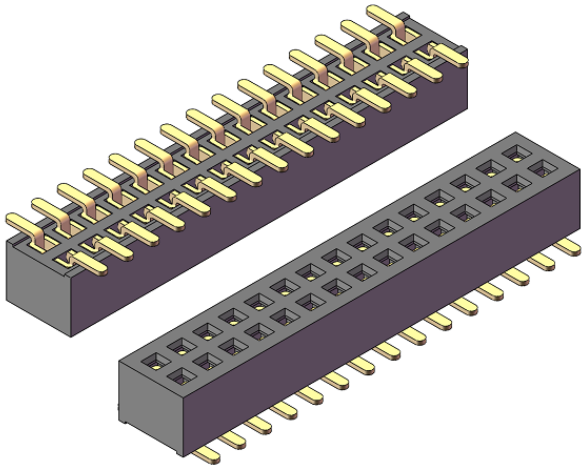

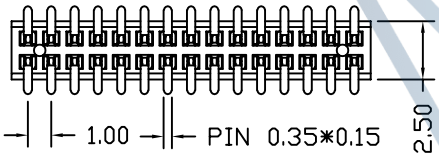





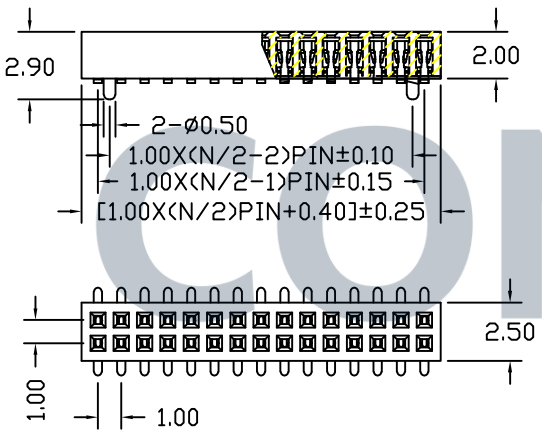





可带内柱

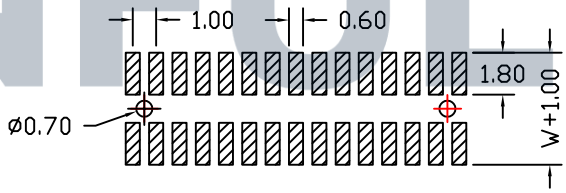

PCB LAYOUT

CONFULL
PRESICION IN EVERY PIN

订购方法 How To Order

1.0排母 — H — B — XX — M — T/A — G 0 — XXX

- H: Plastics Height H=2.0MM
- B: Material Type A=PBT B=Nylon-6T C=LCP D=Nylon-46
- XX: NO. of Positions Per Row 2X50
- M: S:Straight(180°) R:Right Angle(90°) M:S.M.T
- T/A: T:TIN(镀锡) A:Aureate (镀金)
- G 0: Contact Plating SN: Tin G0:Gold Flash G2: 5u" Gold G3: 10u" Gold G4: 15u" Gold G5: 30u" Gold S0:Gold Flash/Tin Standard:G0
- XXX: Pin Lenght 2.0 SMT端子 W=3.80

常规表达：型号（1.0排母座）-胶芯高度（H）- 规格（2*XXP）- 类型（M）- 接触件镀层（XXU"）- 尺寸（W）

＊ 其它要求的产品另外说明Other requests's product on the other hand description

※网址:http://www.cysjconn.com ※ 邮箱：C297284403@163.com ☎ TEL:0755-27364746 FAX:0755-27364705