

1. 27mm, 0.40SQ Board Spacer, Single Row, Straight/Right Angle

SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)
Standard: PA6T Black

接触件Contacts: Brass

接触电镀Contact Plating: Au or Sn over 30 μ" Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: 20mΩ Max.


绝缘电阻Insulator Resistance: 1000MΩ Min.

耐电压Withstanding Voltage: AC 500V





额定电流Current Rating: 1.0 AMP

适用温度范围Operating Temperature: -40°C to +105°C

耐温性能Temperature resistance: 255°C ± 5°C, 3s-5s max

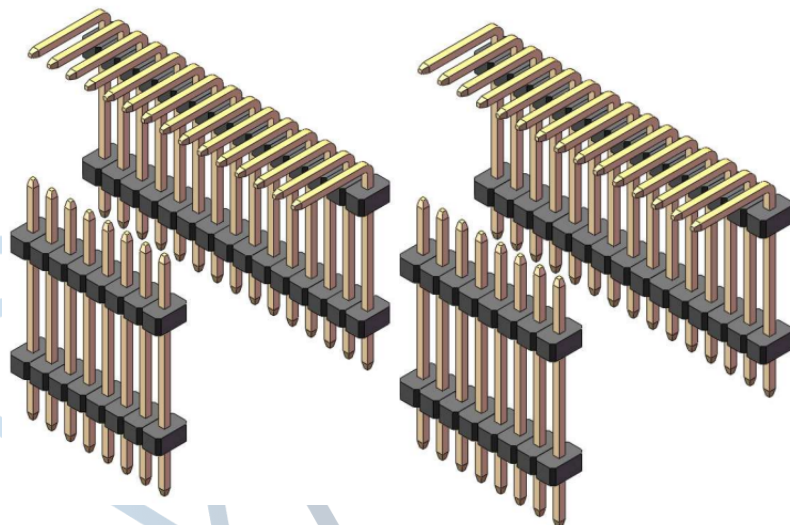

Unit:mm

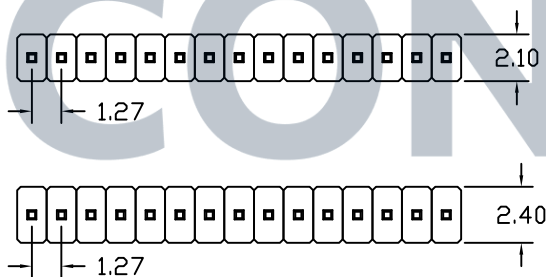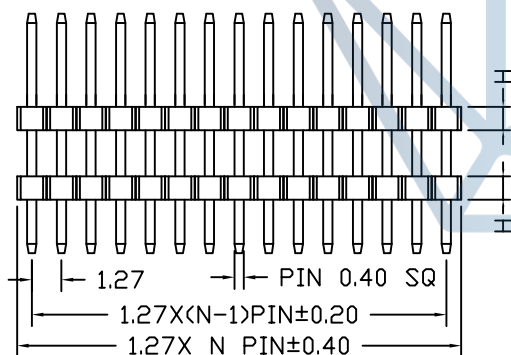

PCB LAYOUT

订购方法 How To Order

1.27排针	H	B	XX	S/R	T/A	G 0	XXX
Plastics Height H=1.0mm(胶宽2.1) H=1.5mm(胶宽2.4) H=1.7mm(胶宽2.4) H=2.0mm(胶宽2.4) H=2.54mm(胶宽2.4)		Material Type A=PBT B=Nylon-6T C=LCP D=Nylon-46	NO. of Positions Per Row 01 thru 50	S: Straight(180°) R: Right Angle(90°) M: S.M.T	T: TIN(镀锡) A: Aureate (镀金)	Contact Plating SN: Tin G0: Gold Flash G2: 5u" Gold G3: 10u" Gold G4: 15u" Gold G5: 30u" Gold S0: Gold Flash/Tin Standard: G0	Pin Length XXX=A+B+C XXX=A+B+C+D+1.05 (塑宽2.1) XXX=A+B+C+D+1.25 (塑宽2.4)

常规表达: 型号 (1.27单排针座) - 胶芯高度 (H) - 材质 (PA6T) - 规格 (1*XXP) - 类型 (S/R) - 接触件镀层 (XXU") - 尺寸 (XXX)

* 其它要求的产品另外说明 Other requests's product on the other hand description