

SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)
Standard: PBT Black

接触件Contacts: Phosphor Bronze

接触电镀Contact Plating: Au or Sn over 30 μ" Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: 20mΩ Max.



绝缘电阻Insulator Resistance: 1000MΩ Min.

耐电压Withstanding Voltage: AC 500V

额定电流Current Rating: 3 AMP

适用温度范围Operating Temperature: -40°C to +105°C

耐温性能Temperature resistance: 205°C ± 5°C, 3s-5s max

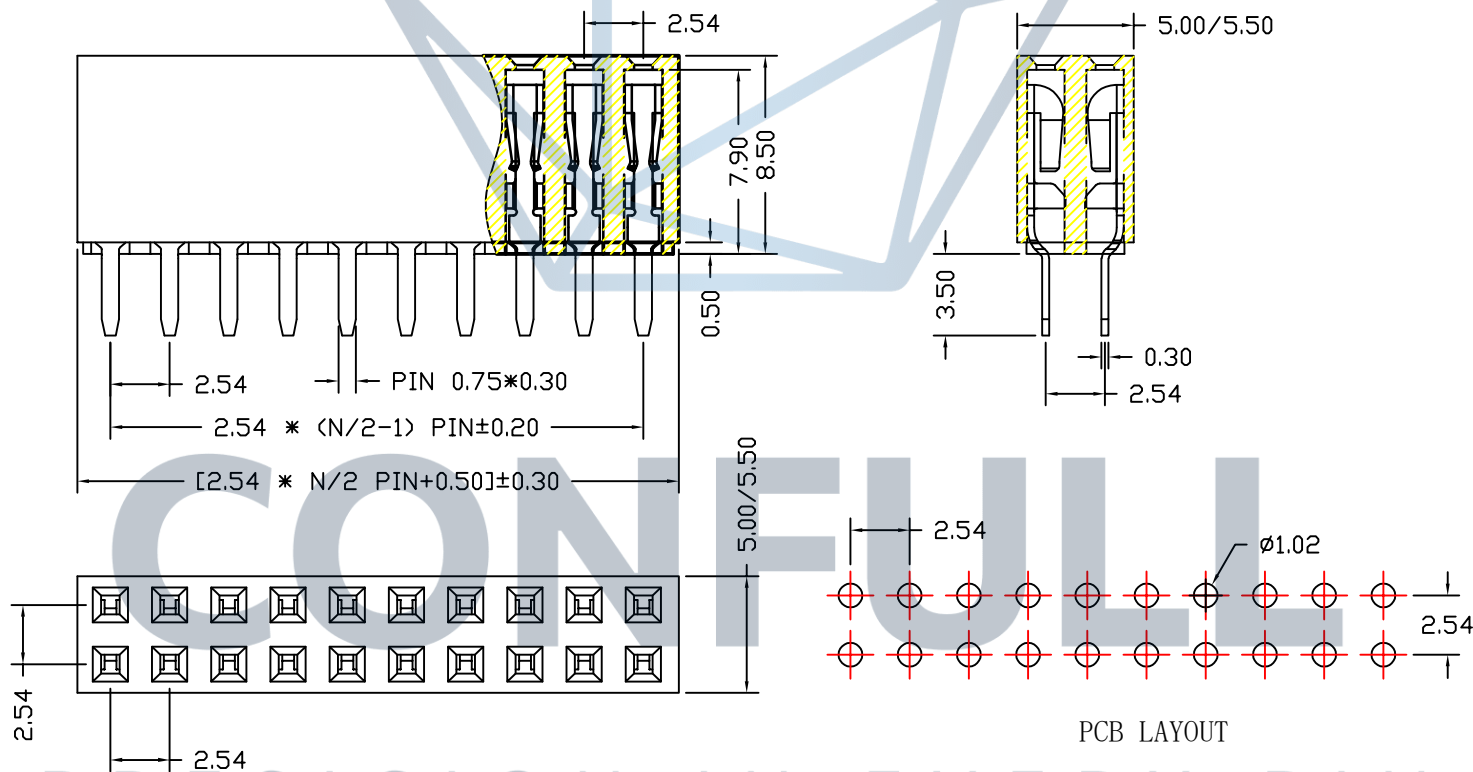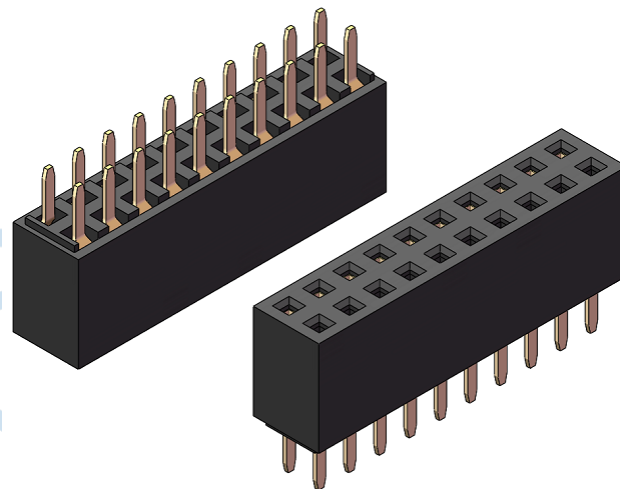

订购方法 How To Order

2.54排母	85	A	XX	S	T/A	G 0	XXX
Plastics Height	Material Type	NO. of Positions	S: Straight(180°)	T: TIN(镀锡)	Contact Plating	Pin Length	
35=3.5mm	A=PBT	Per Row 02 thru 40	R: Right Angle(90°)	A: Aureate (镀金)	SN: Tin	8.5 O型 端子	
50=5.0mm	B=Nylon-6T		M: S.M.T		G0: Gold Flash		
57=5.7mm	C=LCP				G2: 5u" Gold		
68=6.8mm	D=Nylon-46				G3: 10u" Gold		
71=7.1mm					G4: 15u" Gold		
80=8.0mm					G5: 30u" Gold		
81=8.1mm					S0: Gold Flash/Tin		
85=8.5mm					Standard: G0		
11=11mm							

常规表达: 型号 (2.54排母座) - 胶芯高度 (H) - 规格 (2*XXP) - 类型 (S) - 接触件镀层 (XXU") - 尺寸 (XXX)

* 其它要求的产品另外说明 Other requests's product on the other hand description