

1.27mm, 0.40SQ Pin Header, Single Row, Straight/Right Angle

SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)
Standard: PA6T Black

接触件Contacts: Brass

接触电镀Contact Plating: Au or Sn over 30 μ" Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: 20mΩ Max.


绝缘电阻Insulator Resistance: 1000MΩ Min.

耐电压Withstanding Voltage: AC 500V






额定电流Current Rating: 1.0 AMP

适用温度范围Operating Temperature: -40°C to +105°C

耐温性能Temperature resistance: 255°C ± 5°C, 3s-5s max

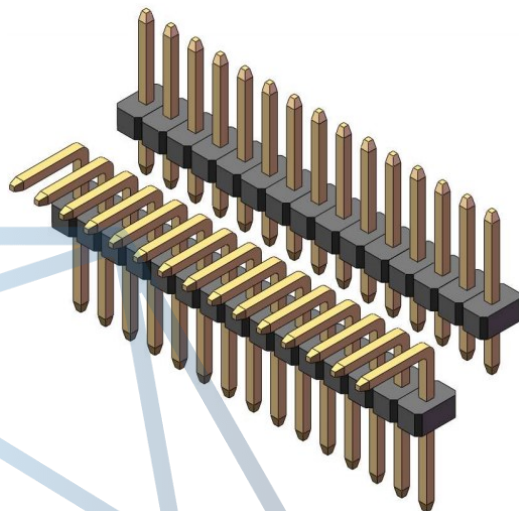

Unit:mm

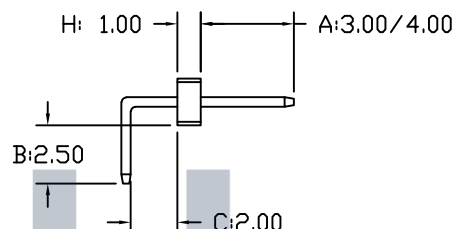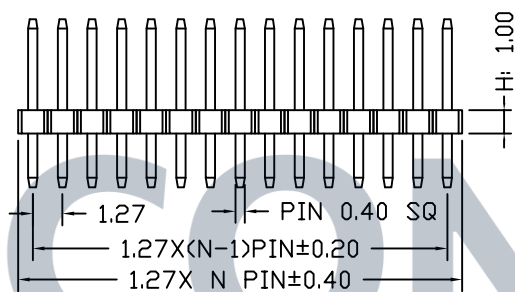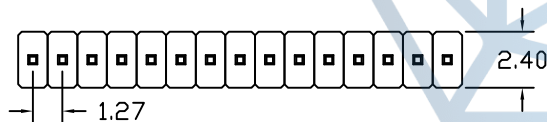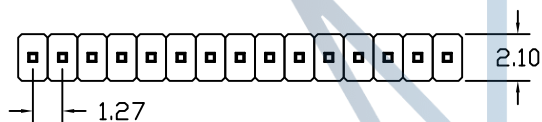

PCB LAYOUT

订购方法 How To Order

1.27排针

H

B

XX

S/R

T/A

G 0

XXX

Plastics Height
H=1.0mm(胶宽2.1)
H=1.5mm(胶宽2.4)
H=1.7mm(胶宽2.4)
H=2.0mm(胶宽2.4)
H=2.54mm(胶宽2.4)

Material Type
A=PBT
B=Nylon-6T
C=LCP
D=Nylon-46

NO. of Positions
Per Row
01 thru 50

S: Straight(180°)
R: Right Angle(90°)
M: S.M.T

T: TIN(镀锡)
A: Aureate
(镀金)

Contact Plating
SN: Tin
G0: Gold Flash
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
S0: Gold Flash/Tin
Standard: G0

Pin Length
XXX=A+B+H
XXX=A+B+C+1.00+1.05
(塑宽2.1)
XXX=A+B+C+H+1.25
(塑宽2.4)

常规表达: 型号 (1.27单排针座) - 胶芯高度 (H) - 材质 (PA6T) - 规格 (1*XXP) - 类型 (S/R) - 接触件镀层 (XXU") - 尺寸 (XXX)

* 其它要求的产品另外说明 Other requests's product on the other hand description