

### SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)  
Standard: PBT Black

接触件Contacts: Brass

接触电镀Contact Plating: Au or Sn over 30 μ" Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: 20mΩ Max.






绝缘电阻Insulator Resistance: 1000MΩ Min.

耐电压Withstanding Voltage: AC 500V

额定电流Current Rating: 3 AMP

适用温度范围Operating Temperature: -40°C to +105°C

耐温性能Temperature resistance: 205°C ± 5°C, 3s-5s max

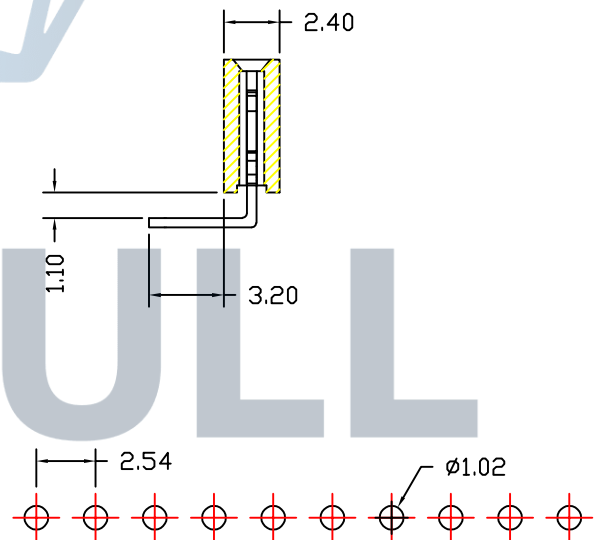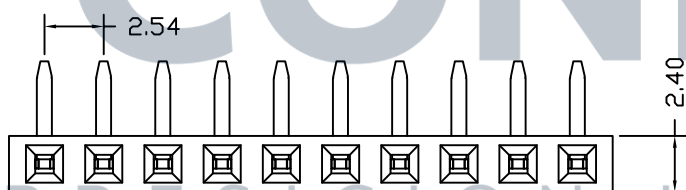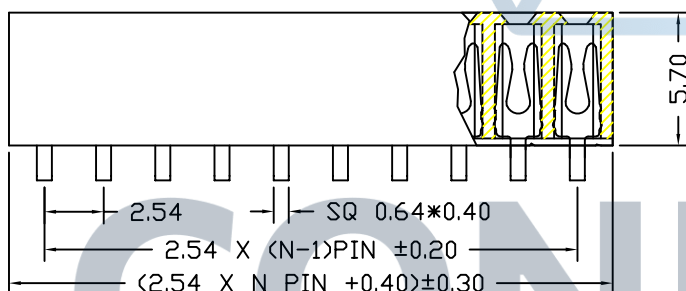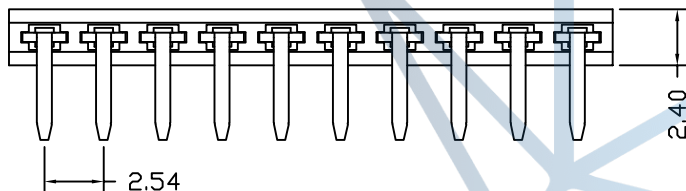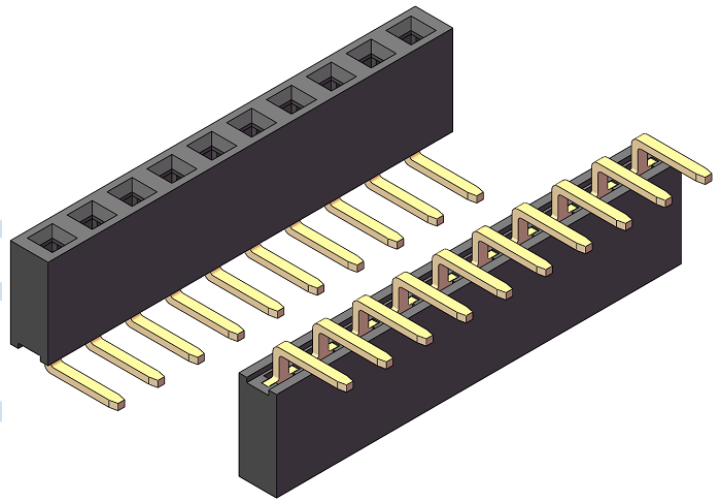

PCB LAYOUT

### 订购方法 How To Order

| 2.54排母                                                                                                                     | 57 | A                                                           | XX                                     | R                                                    | T/A                              | G 0                                                                                                                                                   | XXX                             |
|----------------------------------------------------------------------------------------------------------------------------|----|-------------------------------------------------------------|----------------------------------------|------------------------------------------------------|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| Plastics Height<br>35=3.5mm<br>50=5.0mm<br>57=5.7mm<br>68=6.8mm<br>71=7.1mm<br>80=8.0mm<br>81=8.1mm<br>85=8.5mm<br>11=11mm |    | Material Type<br>A=PBT<br>B=Nylon-6T<br>C=LCP<br>D=Nylon-46 | NO. of Positions<br>Per Row 02 thra 40 | S: Straight(180°)<br>R: Right Angle(90°)<br>M: S.M.T | T: TIN(镀锡)<br>A: Aureate<br>(镀金) | Contact Plating<br>SN: Tin<br>G0: Gold Flash<br>G2: 5u" Gold<br>G3: 10u" Gold<br>G4: 15u" Gold<br>G5: 30u" Gold<br>S0: Gold Flash/Tin<br>Standard: G0 | Pin Lenght<br>(PC外露)<br>PC=3.20 |

常规表达: 型号 (2.54排母座) - 胶芯高度 (H) - 规格 (1 \* XX) - 类型 (R) - 接触件镀层 (XXU") - 尺寸 (XXX)

\* 其它要求的产品另外说明 Other requests's product on the other hand description