

深圳市超越世纪电子有限公司

1.27mm , 0.40SQ Pin Header, Single Row, Right Angle, S. M. T

SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)
Standard: PA6T Black

接触件Contacts: Brass

接触电镀Contact Plating: Au or Sn over 30 μ Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: 20m Ω Max.


绝缘电阻Insulator Resistance: 1000M Ω Min.

耐电压Withstanding Voltage: AC 500V






额定电流Current Rating: 1.0 AMP

适用温度范围Operating Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C

耐温性能Temperature resistance: 255 $^{\circ}$ C $\pm$ 5 $^{\circ}$ C, 3s-5s max

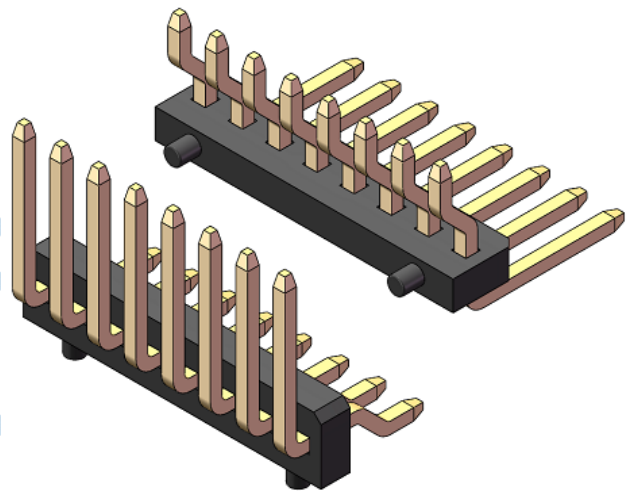

Unit:mm

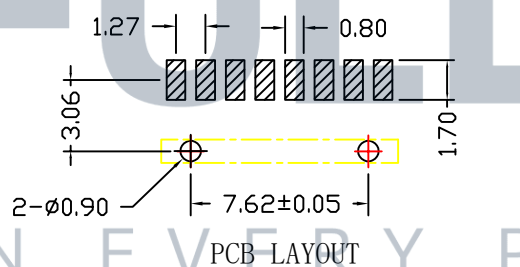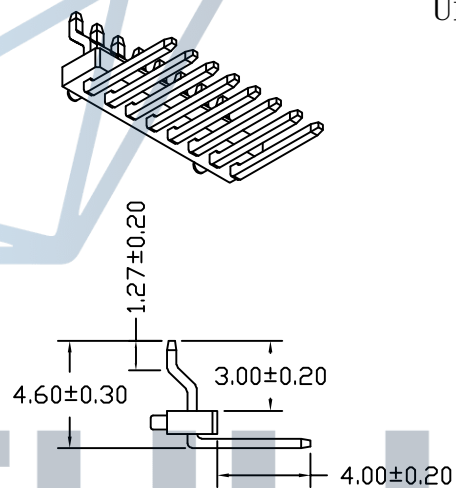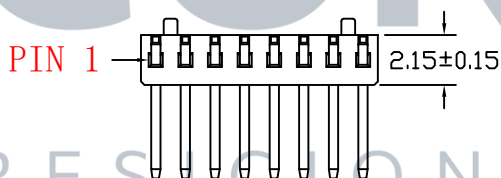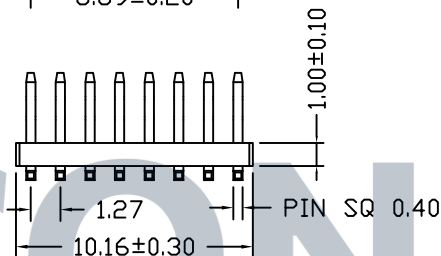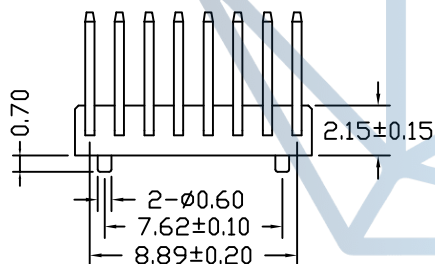

订购方法 How To Order

1.27排针	H	B	XX	R/M	T/A	G 0	XXX
Plastics Height H=1.0mm	Material Type A=PBT B=Nylon-6T C=LCP D=Nylon-46	NO. of Positions Per Row 08 PIN 带侧柱 11 PIN 带侧柱	S: Straight(180°) R: Right Angle(90°) M: S.M.T	T: TIN(镀锡) A: Aureate (镀金)	Contact Plating SN: Tin G0: Gold Flash G2: 5u" Gold G3: 10u" Gold G4: 15u" Gold G5: 30u" Gold S0: Gold Flash/Tin Standard: G0	Pin Lenght XXX=9.50	

常规表达: 型号 (1.27单排针座) - 胶芯高度 (H) - 材质 (PA6T) - 规格 (1*XXP) - 类型 (R/M) - 接触件镀层 (XXU") - 尺寸 (XXX)

* 其它要求的产品另外说明 Other requests's product on the other hand description

» 專業連接器製造供應廠商

※ 网址: <http://www.cysjconn.com> ※ 邮箱: C297284403@163.com

TEL: 0755-27364746 FAX: 0755-27364705