

深圳市超越世纪电子有限公司

2. 0mm Board Spacer, Single Row, Straight/Right Angle

SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)
Standard: PA6T Black

接触件Contacts: Brass

接触电镀Contact Plating: Au or Sn over 30 μ " Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance:20mΩ Max.



绝缘电阻 Insulator Resistance: 1000M Ω Min.

耐电压Withstanding Voltage:AC 500V


额定电流Currrnt Rating:1.5 AMP

适用温度范围Operating Temperature: -40°C to +105°C

耐温性能Temperature resistancet:255℃±5℃, 3s-5s max

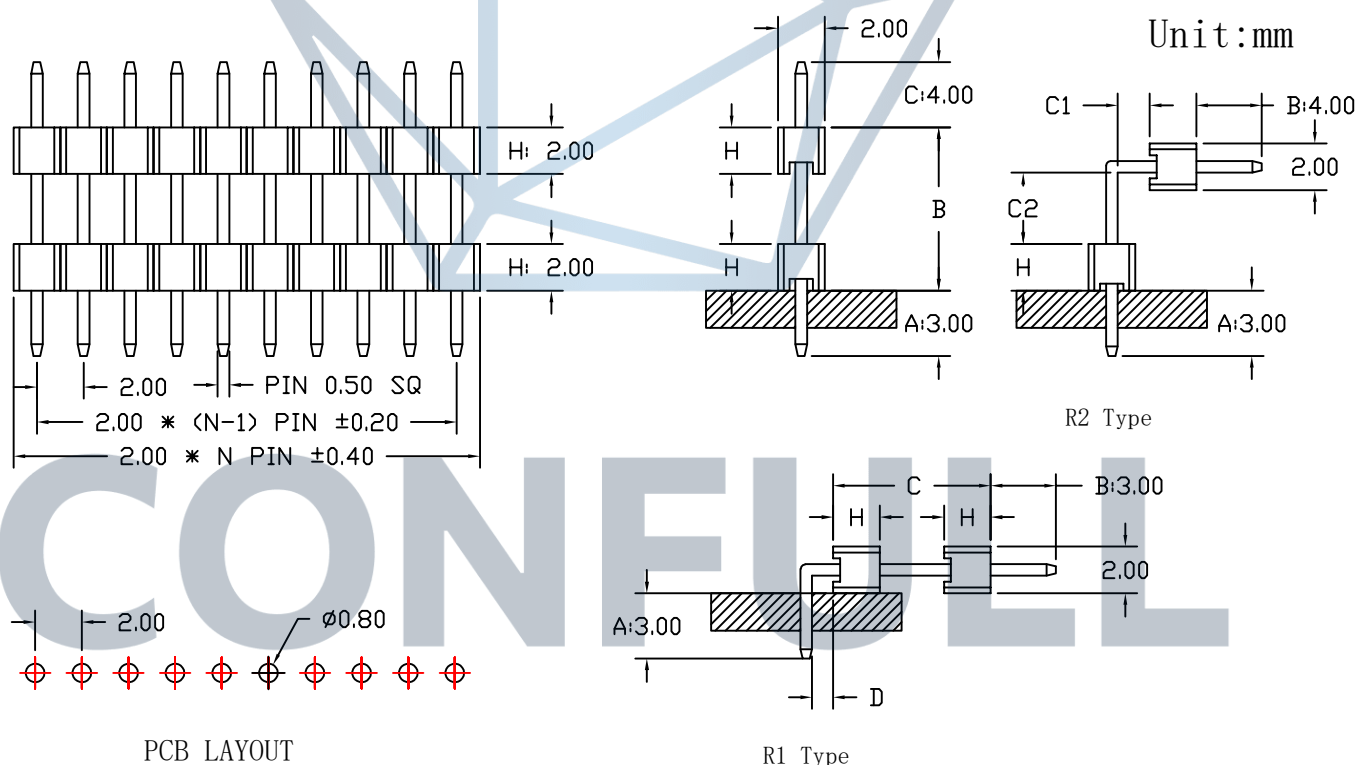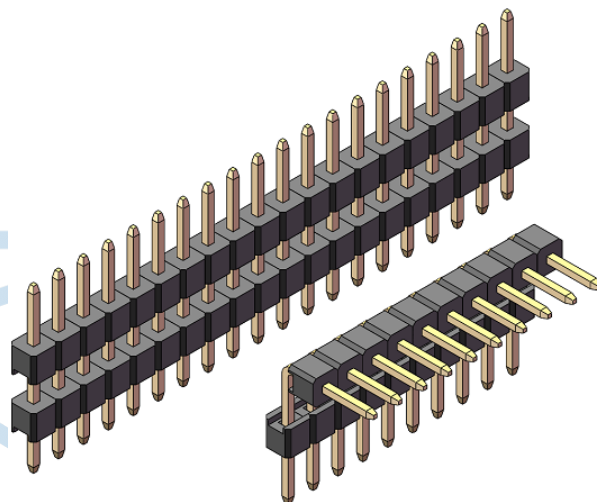

订购方法 How To Order

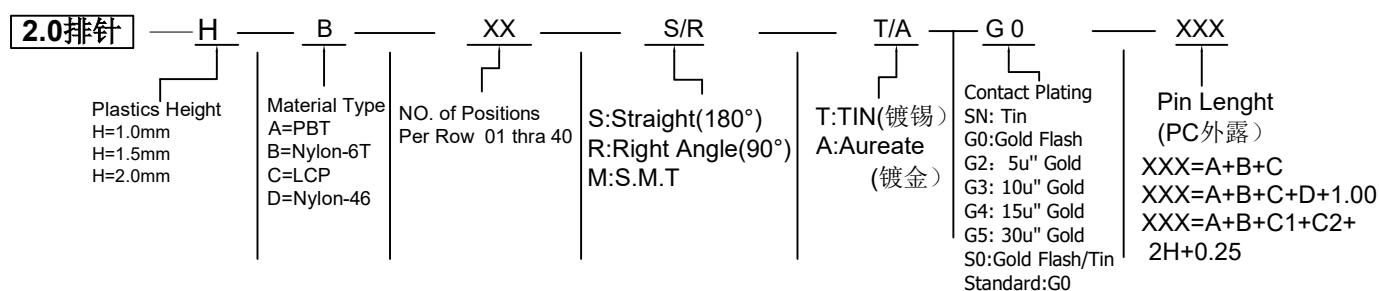

常规表达：型号（2.0单排针座）-胶芯高度（H）-材质（PA6T）-规格（1*XXP）-类型（S/R）-接触件镀层（XXU"）-尺寸（XXX）

* 其它要求的产品另外说明 Other requests's product on the other hand description